

DAIKIN

SAVE UP TO 50%

ON ENERGY COSTS

LOW OPERATING TEMPERATURE

WHOLE UNIT FOR JUST THE COST OF A VARIABLE DISPLACEMENT PISTON PUMP

CAN ADJUST PRESSURES FROM 200psi TO 1,000psi

REDUCE ENERGY CONSUMPTION UP TO 50%

RUNS 40% QUIETER THAN OTHER HYDRAULIC UNITS


DIGITALLY PROGRAMABLE FLOW RATE AND PRESSURE SYSTEM

SWAP OUT ANY HYDRAULIC UNIT IN THE FIELD WITH AN ECO-RICH DUE TO ITS SMALL PROFILE



QUIET OPERATION

MAINTAINS PRESSURE AND SLOWS MOTOR SPEED TO A MINIMUM ROTATION

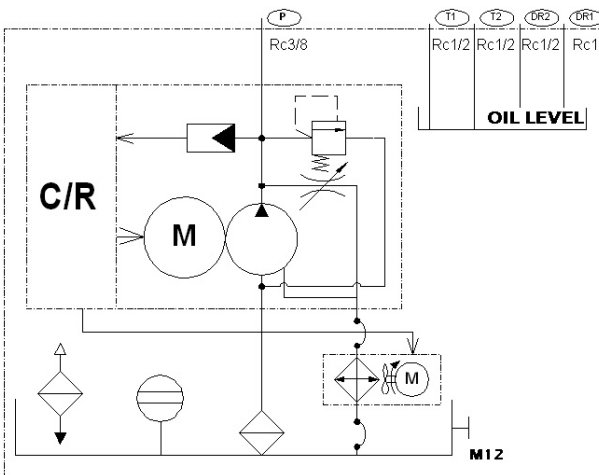

0.1 SECOND MOTOR RESPONSE FOR REQUIRED FLOW WHEN HYDRAULIC ACTUATOR OPERATES.

LESS WASTE OIL

PAYS FOR ITSELF IN 1 TO 2 YEARS

LIVE HYDRAULIC SELF MONITORING SYSTEM, SELF CONTAINED INTERNAL COMPUTER MONITORS OPERATION

MORE DURABLE AND RELIABLE GEAR PUMP AND INVERTER MOTOR OPERATION SYSTEM, FOR LONG LIFE AND DURABILITY



A. Lawrence Machinery

4203 N. Latson Rd

Howell, MI 48855

517-552-5555 FAX 517-545-0556